

Cables 300 V or less need to be a minimum two feet over the street light.




NESC 235H CLEARANCE AND SPACING BETWEEN COMMUNICATIONS

NOTE: These values are intended for NESC inspection reference only and are not intended for construction or design criteria.




NESC 236 CLIMBING SPACE

Climbing Space is an unobstructed, vertical space along the side or corner of the pole. In general, it consists of an imaginary box, 30-inches square, extending at least 40 inches above the highest communications cable or other facility and 40 inches below the lowest communications cable or other facility, but may be shifted from any side or corner to any other side or corner. Support arms are not considered to obstruct the climbing space.


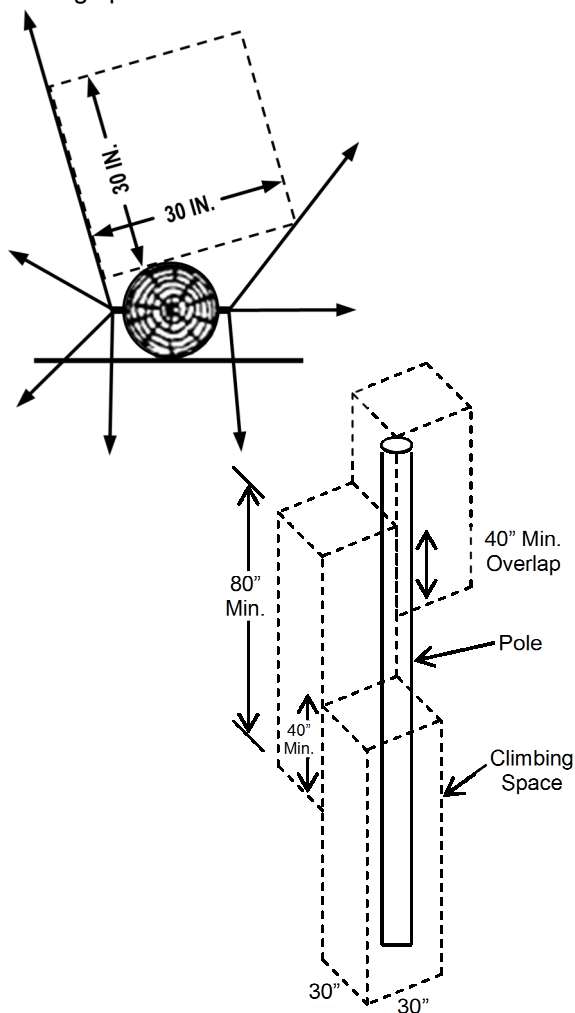


NESC 238 UNGROUND MAST ARMS

(Assume all streetlights are ungrounded unless ground is visible)

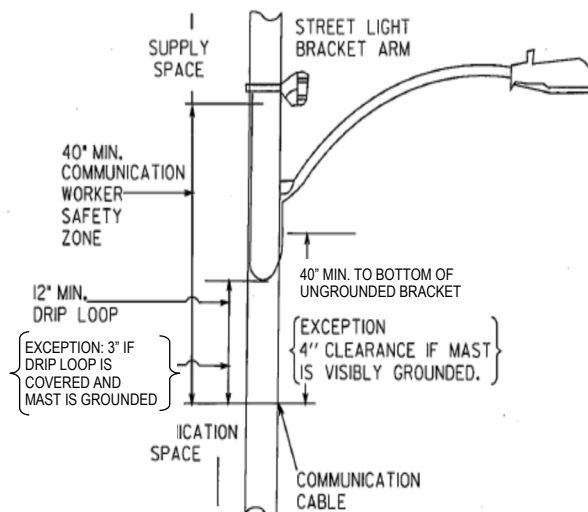

NESC 234C3d(2) SUPPLY CLEARANCE TO WINDOWS

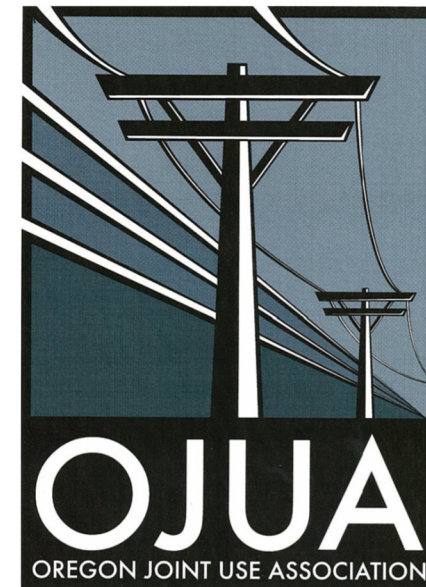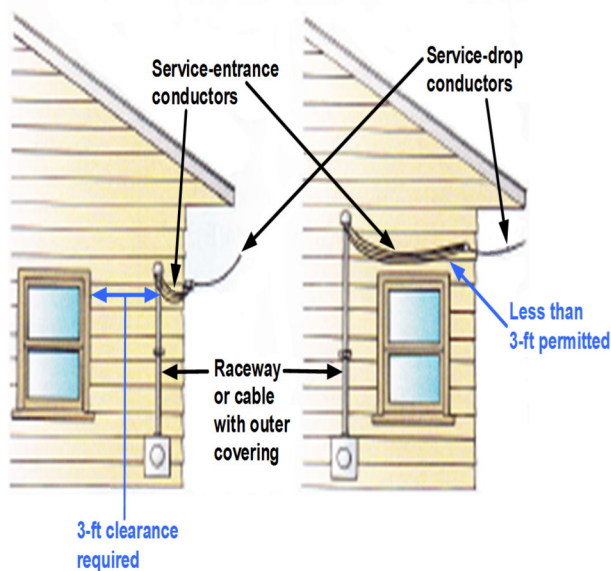

This is not an official codebook. This Document is intended to provide reference for aerial clearances of Communications and Power facilities. When constructing aerial facilities, please refer to the governing codes, such as the National Electrical Safety Code, National Electric Code, Oregon Public Utility Commission Safety Rules, Oregon Occupational Safety and Health Administration, State, County and Municipal codes, and all other applicable company standards, including contracts.

Other Resources:

OJUA www.ojua.org
 OPUC www.oregon.gov/PUC/safety/index.shtml
 IEEE www.ieee.org/portal/site
 NESC <http://standards.ieee.org/nesc>
 OSHA www.osha.org/admin/safejobsb/sjsbagriculture.html

Updated May 2017